




HSF

SPECIFICATIONS:

Contact Resistance: 1Ω Max.
 Insulation Resistance: 5MΩ Min.
 Withstand Voltage: 300V DC,10s
 The Cable Assembly Must 100% Test

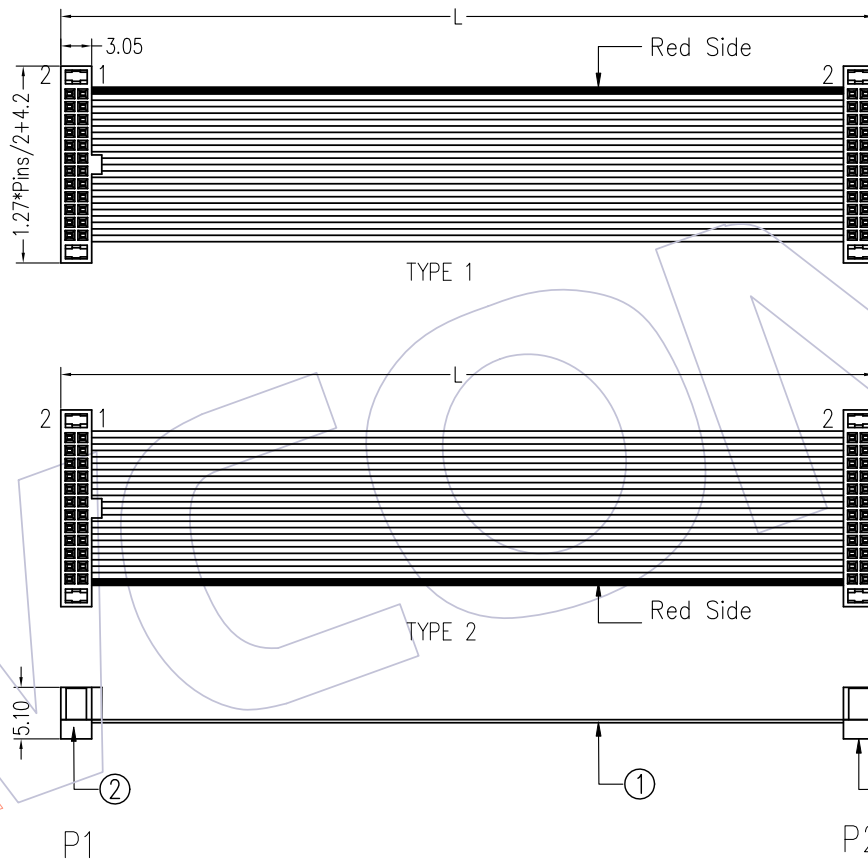

LENGTH	TOLERANCE
≤100	±5
101~1000	±10
1001~3000	±20
3001~	± Lx1%

Ordering Information

FA32 - XX XX A A B XXX - 0 X

No.OF Pins: 06~100p
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, S0=Gold Flash/Ni, S3=10u"Gold/Ni, S4=15u"Gold/Ni, S5=30u"Gold/Ni, SN=Tin
 Connector Color: B=Black
 Connector Direction: A=Same Direction
 Length of Line(mm): XXX
 1=Type 1, 2=Type 2

②	5232-XXUPS0XW01	CONN.	1.27*1.27 IDC Socket,XXP,U Type,W/T Bump,PBT BK,P/Bronze,Sel.Gold Flash/Ni	2	PCS
①	F1U-A30GXXD0-XXXX-X	WIRE	0.635mm Flat Cable,XXP,PVC Grey,Red Side,UL2678,30AWG(7/0.10)	XXX	MM
NO.	PART NO.	NAME	TITLE	QT'Y	UNIT

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2020/07/21	Change drawing frame; Merge Type 1&Type 2	-----	x.x ±0.40	XSR	2020/07/21	UNIT	mm [inch]	FA32-XXXXAABXXX-0X
A0	2011/07/07	NEW	-----	x.xx ±0.25	CHECK	DATE	SIZE	A4	TITLE: 1.27mm IDC Drawing
				x.xxx ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

WCON
 Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com
---	--