


HSF

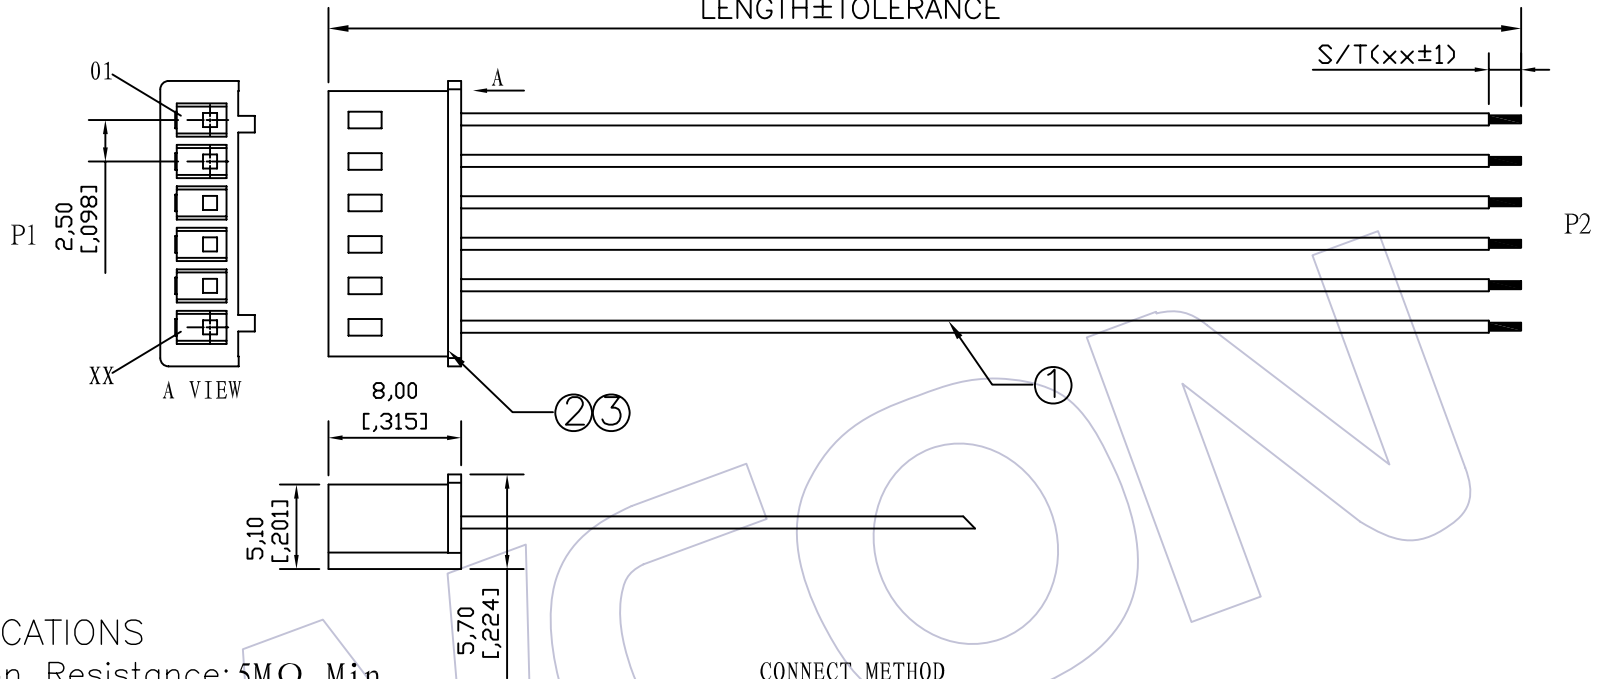

SPECIFICATIONS

Insulation Resistance: $5\text{M}\Omega$ Min
Contact Resistance: 3.0Ω Max
Withstand Voltage: DC 300V, 10S
The Cable Assembly Must 100% Test

Ordering Information

C9130 - xx 01 xxx 201

No.of Pins:
02~15P

Shape Style:
01=one end Pro
another one

Length of Line

CONNECT METHOD

Port	Row	Color	OPEN
P1	01	XXX	OPEN
	02	XXX	OPEN
P2	03	XXX	OPEN
	04	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

③	WF2503-TXSN01	Terminal	PH2. 50mm Phosphor Bronze/Brass Tin Terminal	xx	PCS
②	WF2503-HxxE01	Housing	PH2. 50mm xxP BEIGE Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 22~30, Color: xx, Wire	xxxx	MM
NO.	PART NO.	NAME	Specification	Q' TY	UNIT

					工程图 ENGINEERING	绘图 DRAW	BEN	09/09/24	SCALE	FREE	 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
					X.X	±0.30			UNIT	mm		
					X.XX	±0.20			SIZE	A4	料号 PART NO.	C9130-xx01xxx201
A0	09/09/24	NEW			X.XXX	±0.10			SHEET	1/1	品名 TITLE:	PH2.50 **P Housing TO OPEN
版次 REV	日期 DATE	变 更 说 明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE	Angle DIM	± 2' TOL			PROJ.		客户料号Customer NO.	

WCON 维峰五金电子有限公司
WAFE HARDWARE ELECTRONICS CO. LTD

料号 PART NO.	C9130-xx01xxx201
品名 TITLE:	PH2.50 **P Housing TO OPEN

+	客户料号Customer NO.	
---	------------------	--