


HSF

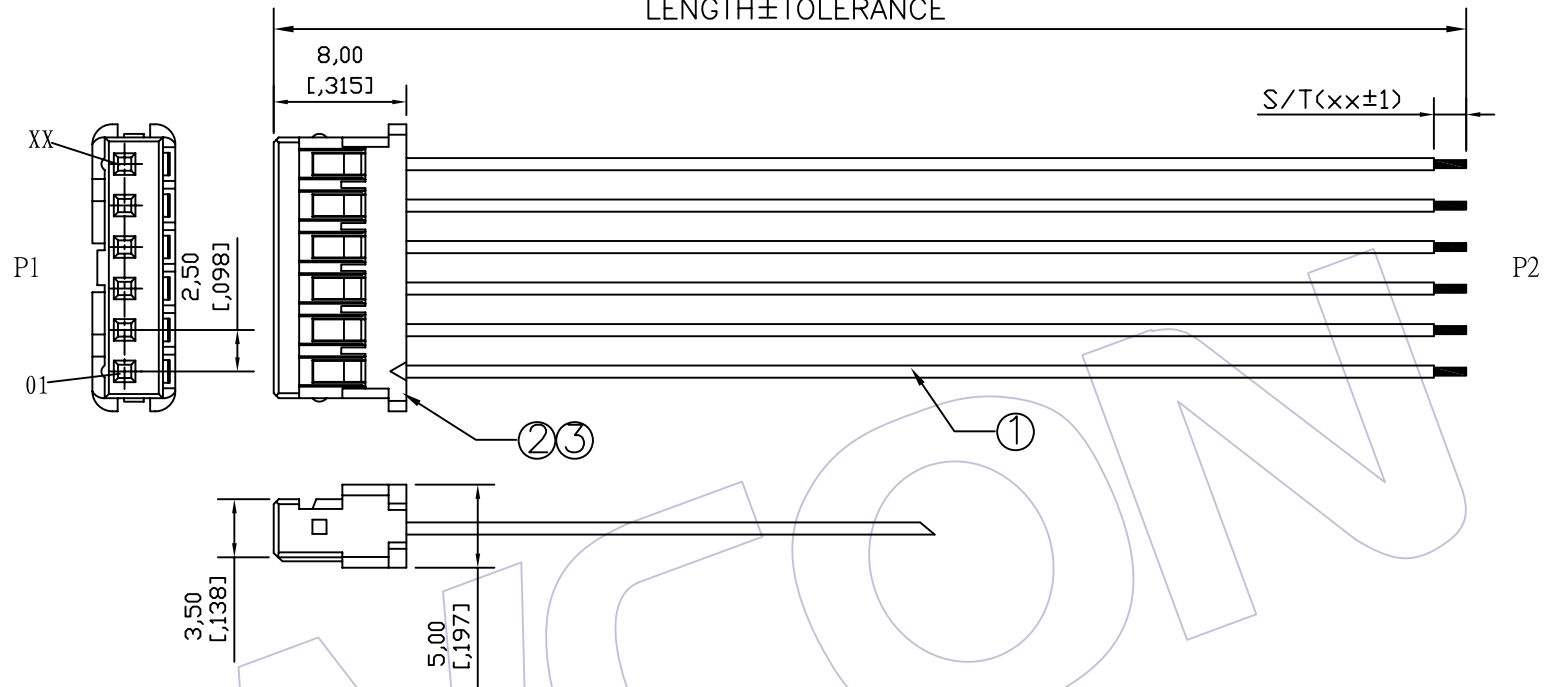

SPECIFICATIONS

Insulation Resistance: 5MΩ Min
Contact Resistance: 3.0Ω Max
Withstand Voltage: DC 300V, 10S
The Cable Assembly Must 100% Test

Ordering Information

C9130 - XX 01 XXX 801

No. of Pins:
02~15P

Shape Style:
01=one end Process,
another one end plate tin

Length of Line

CONNECT METHOD

P1	Color	P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~28AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

③	WF2511-TPSN01	Terminal	PH2.50mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF2511-HxxW01	Housing	PH2.50mm xxP White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 22~28, Color: xx, Wire	xxxx	MM
NO.	PART NO.	NAME	Specification	Q'TY	UNIT

工程图 ENGINEERING	绘图 DRAW	BEN	09/09/26	SCALE	FREE	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
X.X	±0.30	设计 DESIGN		UNIT	mm		
X.XX	±0.20	审核 CHECK		SIZE	A4	料号 PART NO.	C9130-xx01xxx801
X.XXX	±0.10	核准 APPROVE		SHEET	1/1	品名 TITLE:	PH2.50 **P Housing TO OPEN
Angle DIM	± 2° TOL	核准 APPROVE		PROJ.	客户料号 Customer NO.		

A0	09/09/26	NEW		
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION	变更 CHANGE	核准 APPROVE