





# HSF

## NOTES:

1. Material Specification: PBT, UL94V-0, BK;
2. Withstand Voltage: 3000V AC;
3. Insulation Resistance: 1000MΩ Min;
4. Operating Temperature: -40°C to +125°C;
5. Application Terminal: WD10160-MTD4XXXXXX;
6. RoHS Compliant

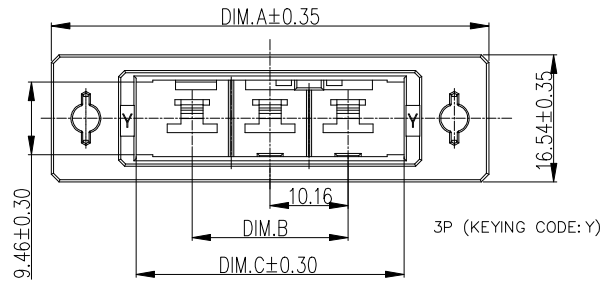

KEYING SHOWN  
SCALE 1:2

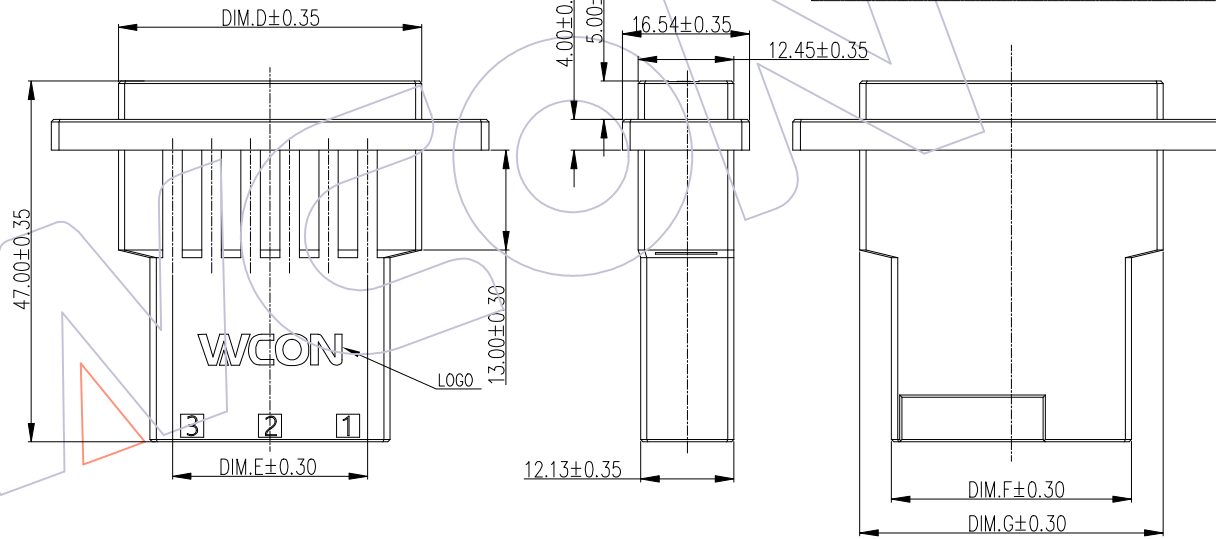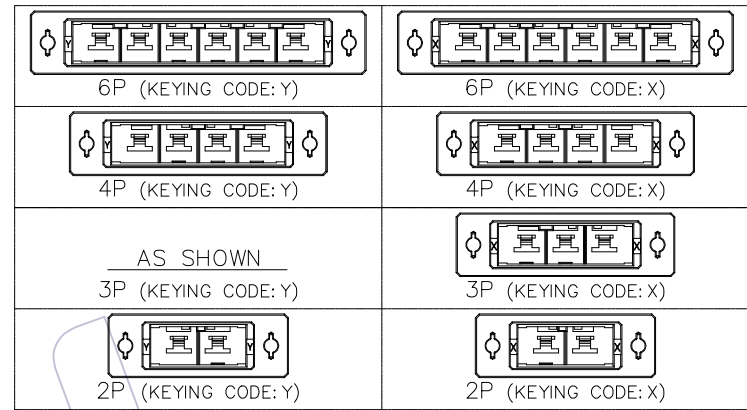

3D VIEW

## Ordering Information

WD10160-1 HG XX B O XX W


- 1=Single Row
- HK=Panel Housing
- No. of Pins: 02=2P; 03=3P; 04=4P; 06=6P

Color:  
B=Black

PACKING: PE Bag

CODE OF KEYING  
01=X; 02=Y

Blank=Without "WCON" Logo  
W=With "WCON" Logo

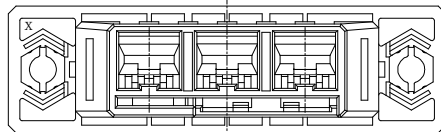

	2PIN	3PIN	4PIN	6PIN
DIM.A	47.00	57.00	67.16	87.48
DIM.B	10.16	20.32	30.48	50.80
DIM.C	24.76	34.92	45.08	65.40
DIM.D	29.36	39.52	49.68	70.00
DIM.E	15.24	25.40	35.56	55.88
DIM.F	21.11	31.27	41.43	61.75
DIM.G	29.36	39.52	49.68	70.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	FIT	PART NO.
				x.x	±0.40					
				x.xx	±0.25	CHECK	DATE			WD10160-1HGXXB0XX(W) TITLE: 10.16mm Dyn Receptacle, Panel Type Housing, Single Row Customer NO.
				x.xxx	±0.15	XYQ	2022.09.10	SIZE	A4	
				Angle	± 3'	APPROVE	DATE	SHEET	1/1	
				DIM	TOL	ZSZ	2022.09.10	PROJ.		

# WCON

Http: www.wcon.com

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: sales@wcon.com

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: salesks@wcon.com