

HSF

NOTES:

- 1.Material Specification:PBT,UL94V-0,BK;
- 2.Withstand Voltage: 3000V AC;
- 3.Insulation Resistance: 1000MΩ Min;
- 4.Operating Temperature: -40°C to +125°C;
- 5.Application Terminal: WD10160-3TD4XXX01;
- 6.RoHS Compliant

	DIM.A	DIM.B	DIM.C	DIM.D
2 PIN	35.76	23.76	26.06	10.16
3 PIN	45.92	33.92	36.22	20.32
4 PIN	53.68	44.08	46.38	30.48
6 PIN	73.02	64.40	66.70	50.80

Ordering Information

WD10160-1 H XX B O XX X

1=Single Row

H=HOUSING




No.of Pins:
02=2P;03=3P;
04=4P;06=6P

Color:
B=Black



PACKING:PE Bag

CODE OF KEYING
01=X; 02=Y


Blank=Without "WCON" Logo
W=With "WCON" Logo

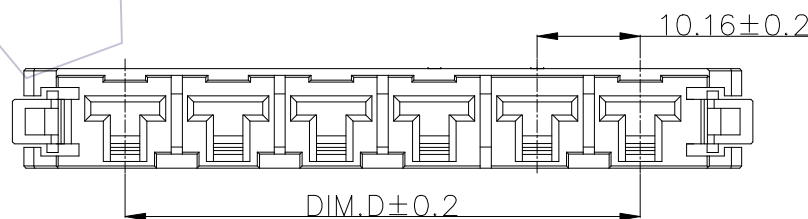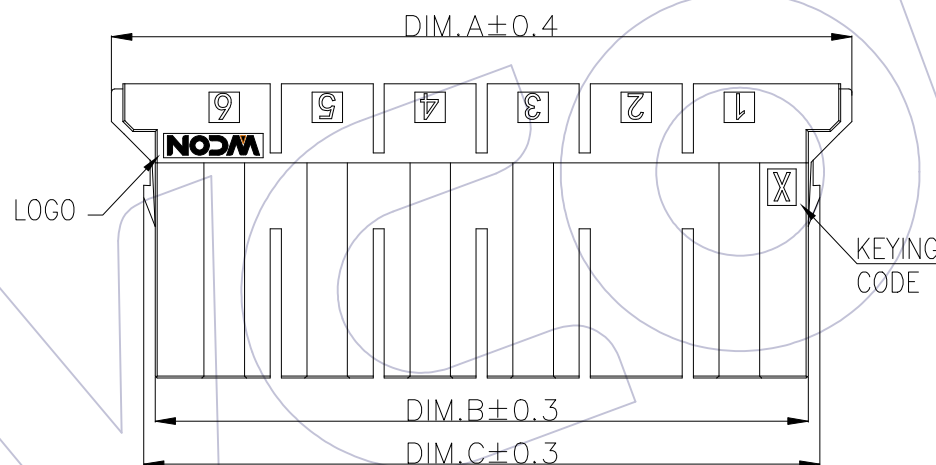

KEYING SHOWN

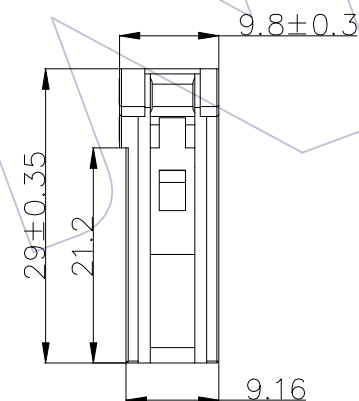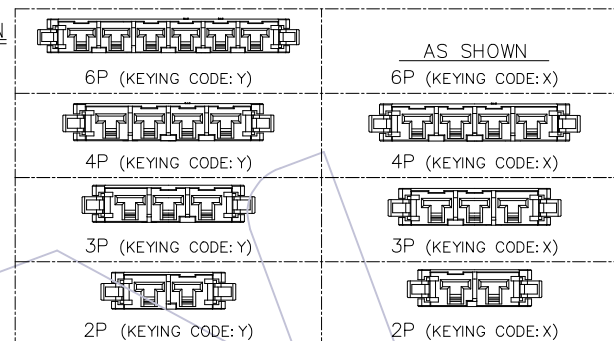

2P/3P ONLY



				OPERATION		DRAW ZJQ	DATE 2023.04.06	SCALE	FIT	PART NO. WD10160-1HXXB0XXX	 Http: www.wcon.com WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
				X.X	±0.40		CHECK XYQ		UNIT	mm	
				X.XX	±0.25	APPROVE ZSZ		DATE 2023.04.06	SIZE	A4	
A0	2023.04.06	NEW	ZJQ	X.XXX	±0.15		DATE 2023.04.06	SHEET	1/1	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°		PROJ.				
				DIM	TOL						