


HSF

NOTES:

Rated Current: 0.5~1.0 AMP. Δ
 Contact Resistance: 25m Ω Max.
 Withstand Voltage: 500V
 Insulation Resistance: 10000M Ω Min.
 Operation Temperature: -55 $^{\circ}$ C to +125 $^{\circ}$ C

Contact Material: Phosphor Bronze
 Contact Plating: Sn and Au over Ni
 Tail Material: Phosphor Bronze
 Tail Plating: Sn over Ni
 Main Body Material: LCP
 CAP Material: LCP

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE \pm 0.05)

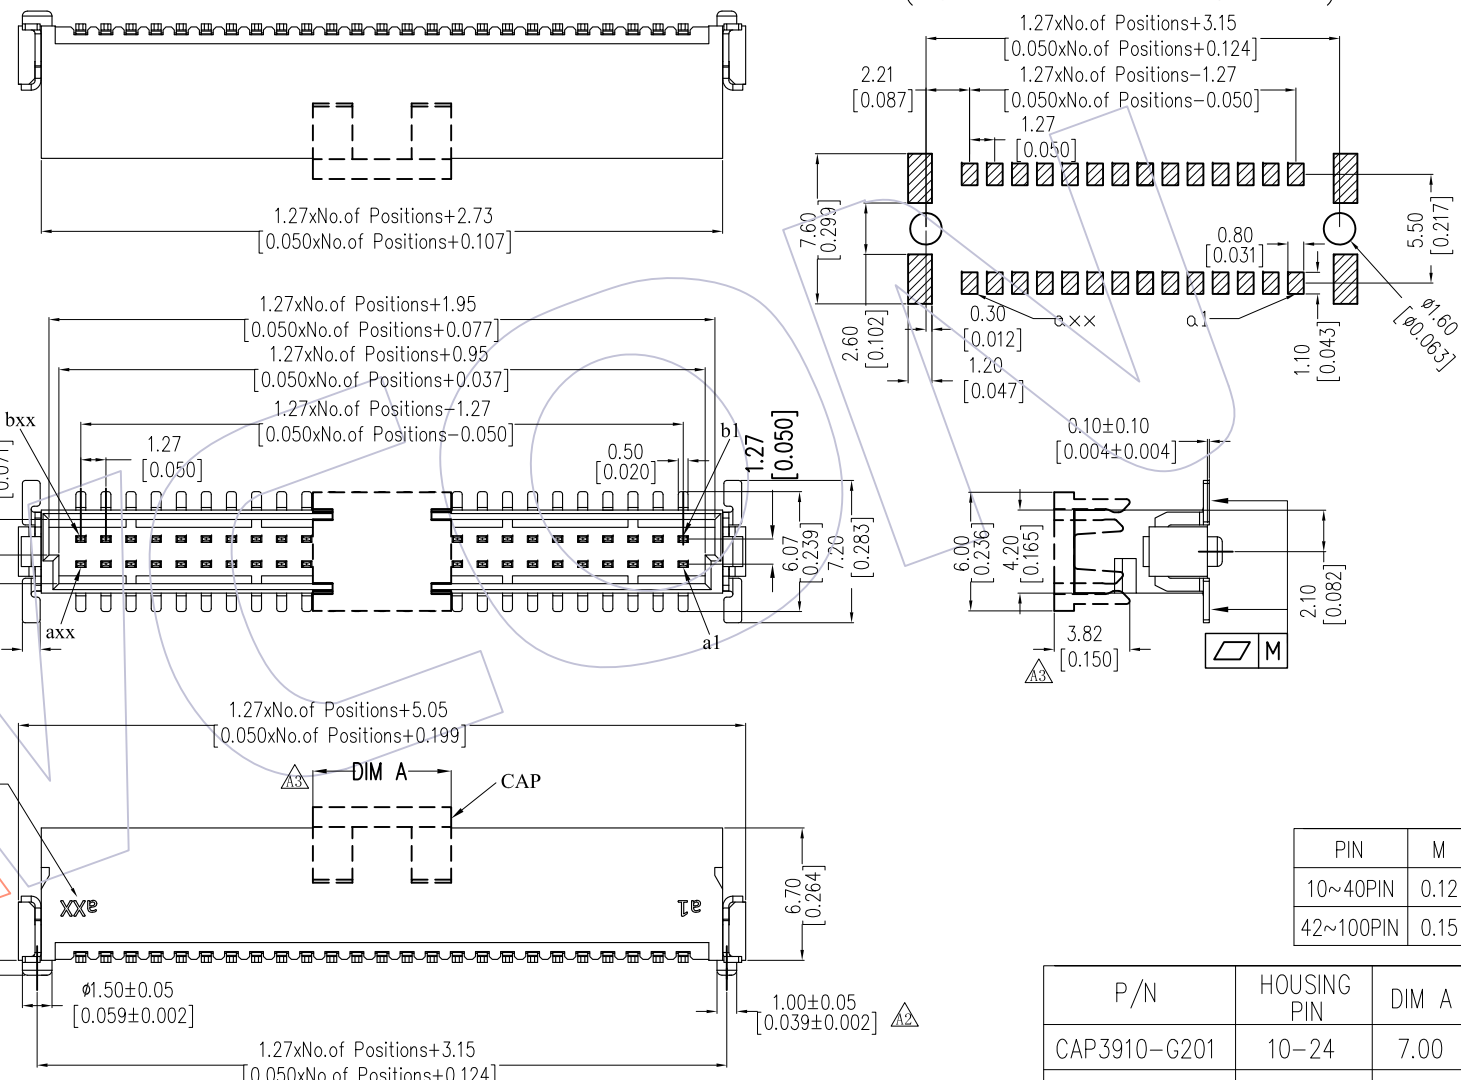

Ordering Information

3910-P XXX-067 M XX WR 1

No. of Pins
 010: 10 Pin
 012: 12 Pin
 020: 20 Pin
 100: 100 Pin

Plating
 S0=Gold Flash/Tin
 S1=3U" Au/Tin
 S3=10U" Au/Tin
 S4=15U" Au/Tin
 S5=30U" Au/Tin

Package
 R: Tape & Reel
 "XX" = P/2

PIN	M
10~40PIN	0.12
42~100PIN	0.15

P/N	HOUSING PIN	DIM A
CAP3910-G201	10-24	7.00
CAP3910-G202	26-100	16.00

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.
A4	2018/05/04	Modify	---	OPERATION	DING	2018/05/04	1:1	3910-PXXX-067MXXWR1
A3	2018/04/17	CAP Modify	---	x.x \pm 0.40	DING	DATE	mm	TITLE: Δ 1.27Pitch SDC CONNECTORS MALE "E" TYPE H=6.70mm(TYPE Q)
A2	2017/12/29	Modify	---	x.xx \pm 0.25	CHECK	DATE	A4	Customer NO.
A0	2017/08/28	NEW	---	x.xxx \pm 0.15	APPROVE	DATE	1/1	
				Angle \pm 3'				
				DIM TOL				

UNIT	SIZE	SHEET	PROJ.
mm	A4	1/1	

WCON
 Http: www.wcon.com

WCON-Dongguan WCON-Kunshan
 Tel: +86 769 85358920 Tel: +86 512 57468408
 Fax: +86 769 85358915 Fax: +86 512 57468468
 E-mail: sales@wcon.com E-mail: sales@wcon.com